GC72100 Golf Cart Lithium Battery



[GC72100]

Long Cycle Life: provides up to 20 times longer cycle life and 5 times longer float/service life than lead acid, battery help to minimize replacement costs and reduce total cost of ownership.

Smaller Footprint: better gravimetric/volumetric specific energy up to 3 times compare with lead acid battery.

More Available Energy: deliver twice energy of the lead acid battery, when discharged with heavy load.

Superior Safety: build-in BMS——eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation with safe lithium iron phosphate chemistry.

Fully compatible: design to replace VRLA battery, compatible with conventional lead acid powered system.

ע Technical Parameters

Discharge Cut-off Voltage (V) Float Charge Voltage (V) Standard Charge/Discharge Current (A) Max. Charge/Discharge Current (A) 100 CH / 315 DCH	Nominal Voltage (V)	76.8
End Charge Voltage (V) Discharge Cut-off Voltage (V) Float Charge Voltage (V) Standard Charge/Discharge Current (A) Max. Charge/Discharge Current (A) Peak Output Current (A) Lithium Chemistry Cycle Life	Nominal Capacity (Ah)	100
Discharge Cut-off Voltage (V) Float Charge Voltage (V) Standard Charge/Discharge Current (A) Max. Charge/Discharge Current (A) Peak Output Current (A) Lithium Chemistry Cycle Life 60 82.8 50 CH / 100 DCH 100 CH / 315 DCH 470 @1s	Total Energy (Wh)	7680
Float Charge Voltage (V) Standard Charge/Discharge Current (A) Max. Charge/Discharge Current (A) Peak Output Current (A) Lithium Chemistry Cycle Life 82.8 50 CH / 100 DCH 100 CH / 315 DCH 470 @1s	End Charge Voltage (V)	87.6
Standard Charge/Discharge Current (A) Max. Charge/Discharge Current (A) Peak Output Current (A) Lithium Chemistry Cycle Life 50 CH / 100 DCH 100 CH / 315 DCH 470 @1s	Discharge Cut-off Voltage (V)	60
Max. Charge/Discharge Current (A) Peak Output Current (A) Lithium Chemistry Cycle Life 100 CH / 315 DCH 470 @1s	Float Charge Voltage (V)	82.8
Peak Output Current (A) Lithium Chemistry Cycle Life 470 @1s LiFePO ₄	Standard Charge/Discharge Current (A)	50 CH / 100 DCH
Lithium Chemistry Cycle Life 4500	Max. Charge/Discharge Current (A)	100 CH / 315 DCH
Cycle Life 4500	Peak Output Current (A)	470 @1s
3,310 2.110	Lithium Chemistry	LiFePO ₄
Design Life 10 years	Cycle Life	4500
· ·	Design Life	10 years

Mechinical Specifications لا


Dimension (mm)	W740 * D320 * H246
Weight (kg)	Approx. 72
Communication	CAN
Ingress Rating	IP 67
Safety Standards	UN38.3, CE




☑ Environmental Specifications

Storage Temperature (°C)	-20 ~ 45 (1 month)
Operating Temperature Charge (°C)	0 ~ 55
Operating Temperature Discharge (°C)	-20 ~ 55
Operating Relative Humidity	5 ~ 95%

☑ Operating Performance

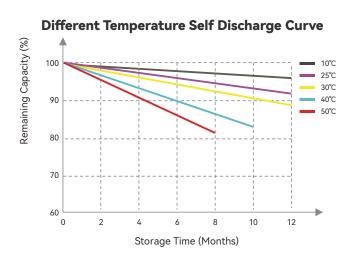

Different DOD Discharge Cycle Life Curve (0.5C)

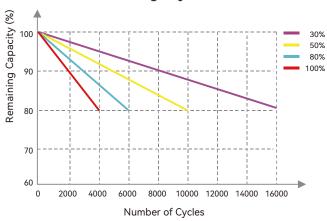

Notes:

Battery should be kept in a dry and ventilated place, avoid direct contact with corrosive substances, also away from sources of fire and heat. Keep the SOC of the battery above 50% if you need to store it for an extended long period. It should be refresh charged every 3 months regularly and SOC should be maintained at about 50% if battery will be stored for a long term.

