

Li-ion Battery Series

Long Cycle Life: Provides up to 20 times longer cycle life and 5 times longer float/service life than lead acid, battery help to minimize replacement costs and reduce total cost of ownership.

Smaller Footprint: Better gravimetric/volumetric specific energy up to 3 times compare with lead acid battery.

More Available Energy: Deliver twice energy of the lead acid battery, when discharged with heavy load.

Superior Safety: Build-in BMS——Eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation with safe lithium iron phosphate chemistry.

Fully compatible: Design to replace VRLA battery, compatible with conventional lead acid powered system

ע Technical Parameters

12.8
32
409.6
14.6
10
13.8
16 CH / 16 DCH
32 CH / 32 DCH
40@60s
LiFePO ₄
6000 @ 0.5C 80% DOD
20 years
2P or 2S

Mechinical Specifications لا


Dimension (mm)	W223 * D95 * H175
Weight (kg)	Approx. 3.5
Communication	
Ingress Rating	IP 65
Safety Standards	UN38.3, CE




צ Environmental Specifications

Storage Temperature (°C)	-20 ~ 55
Operating Temperature Charge (°C)	0 ~ 55
Operating Temperature Discharge (°C)	-20 ~ 60
Operating Relative Humidity	5 ~ 95%

☑ Operating Performance

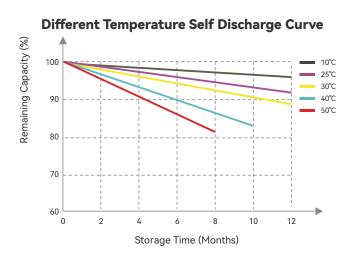

Different DOD Discharge Cycle Life Curve (0.5C)

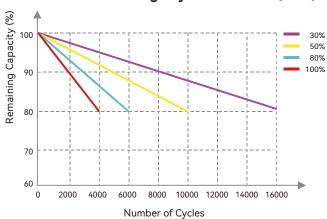

Notes

Battery should be kept in a dry and ventilated place, avoid direct contact with corrosive substances, also away from sources of fire and heat. Keep the SOC of the battery above 50% if you need to store it for an extended long period. It should be refresh charged every 3 months regularly and SOC should be maintained at about 50% if battery will be stored for a long term.

Applications

