



W24200

# W24200

## Residential Energy Storage Battery Series

**Widely Compatibility:** support major leading inverter brands and conventional VRLA powered system.

**Superior Safety:** build-in BMS——eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation with safe lithium iron phosphate chemist.

**Flexible Configuration:** wall-mount design easy to be installed. Optional HMI, max. 16 sets in parallel supported.

**High Performance:** support 1C or 120A charge/discharge, widely working temperature. Cells comply with CE, UL and IEC standards.

### Technical Parameters

Nominal Voltage (V)	25.6
Nominal Capacity (Ah)	200
Total Energy (Wh)	5.12
Operating Voltage Range (V)	21.6 ~ 29.2
Standard Charge/Discharge Current (A)	100 CH / 100 DCH
Max. Charge/Discharge Current (A)	120 CH / 120 DCH
Peak Output Current (A)	150@10s
Lithium Chemistry	LiFePO <sub>4</sub>
Cycle Life	6000 @ 0.5C 80% DOD
Design Life	20 years
Scalability	Max 16P (less than 8P need no external setup)
Installation	Wall mount

### Mechanical Specifications


Dimension (mm)	W460 * D140 * H500
Weight (kg)	Approx. 43
Communication	RS485, CAN
Ingress Rating	IP 54
Safety Standards	UN38.3, CE

## Environmental Specifications


Storage Temperature (°C)	-20 ~ 55
Operating Temperature Charge (°C)	0 ~ 55
Operating Temperature Discharge (°C)	-20 ~ 60
Operating Relative Humidity	5 ~ 95%

## Operating Performance

Different Temperature Self Discharge Curve

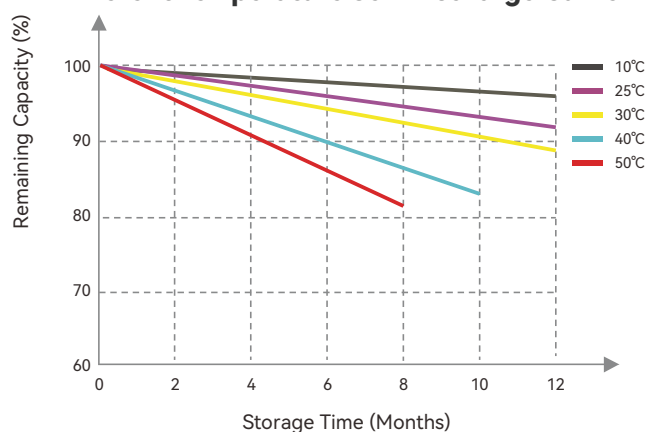

Different DOD Discharge Cycle Life Curve (0.5C)

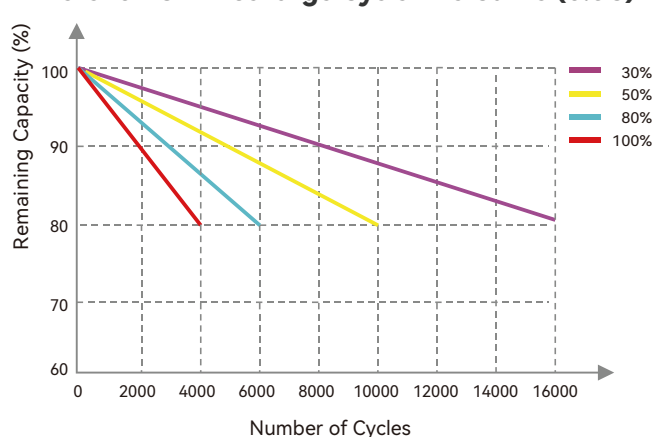

Notes:

Battery should be kept in a dry and ventilated place, avoid direct contact with corrosive substances, also away from sources of fire and heat. Keep the SOC of the battery above 50% if you need to store it for an extended long period. It should be refresh charged every 3 months regularly and SOC should be maintained at about 50% if battery will be stored for a long term.

## Compatible Inverters

**Deye** 德業

**Growatt** POWERING TOMORROW

**MUST** 美世乐

**GOODWE** 固德威

**LU X POWER** TEK

**BLUESUN** SOLAR BRASIL

**f** elicity

**SRNE** 碩日

**Schneider** Electric

**victron energy** BLUE POWER

**Voltronic Power** Advancing Power

**SMA**

**MEGAREVO**

**SUMRY**

**SMK SOLAR**

Bounergy reserve the final right of explanation.  
©BOUNERGY. All rights reserved. Trademarks and logos are the property of BOUNERGY and its affiliates unless otherwise noted. Subject to revisions without prior notice.

**BOUNERGY**

Release: BO-PD-2407-1.0